

Lubrication and cleaning:

Lubricate every 30 days of riding or sooner if chain appears dry. The O-rings in this chain can be damaged by steam cleaning, high pressure washers, and certain solvents.


Clean the chain with kerosene. Wipe dry and lubricate only with SAE 80 or 90 gear oil. Commercial chain lubricants may contain solvents which could damage the rubber O-rings.

Drive Chain Slider

Check the drive chain slider at the intervals specified in the Maintenance Schedule.

When the depth of the grooves in the slider reaches 2.0 mm (0.08 in), remove material to lower the height of the center ridge between the grooves to less than 2.0 mm (0.08 in).

Replace the slider when the depth of the grooves reaches 6.0 mm (0.24 in).

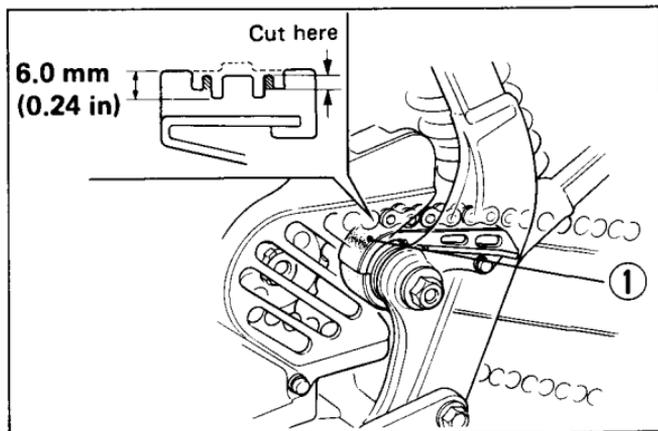

(1) Chain slider