
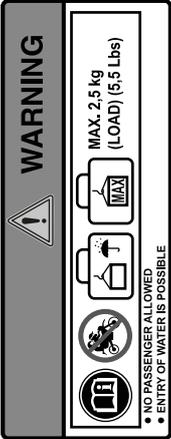


4		<p>Radiator cap label</p> <p>Danger</p> <ul style="list-style-type: none"> • Never open when hot. • Hot coolant will scald you. • Relief pressure valve begins to open at 1.1 Kg/cm². 	
5		<p>LOADING AND ACCESSORIES WARNING LABEL</p> <p>WARNING</p> <p>LOADING AND ACCESSORIES</p> <ul style="list-style-type: none"> • The stability and handling of this motorcycle can be affected by the addition of accessories and luggage. • The total weight of the accessories and luggage, added to the rider's own weight, must not exceed 111 kg, which is the maximum weight capacity. • The addition of large fairings mounted on the fork or handlebars is not recommended. • It is totally prohibited to transport cargo on the rear fender. The motorcycle has not been designed for this purpose. 	
6		<p>EC label</p>	
7		<p>REAR DAMPER LABEL</p> <p>GAS REFUELING</p> <ul style="list-style-type: none"> • Do not open. • Do not heat. 	